

HARDINGE WORKHOLDING

SWISS-TYPE COLLETS & BUSHINGS



Table of Contents

Headstock Collets	3
Sub-Spindle Collets	3
Guide Bushings	4
Machine Tool Builders' Reference	
Citizen	5
Hardinge	5
Hanwha	6
KSI	6
Maier	6
Star	7
Swistek	7
Nomura	8
NexTurn	8
Tornos	8
Traub	8
Tsugami	9
Bechler	10
Methods	10
Peterman	10
Strohm	10
Collet Cross Reference Guide	11
Emergency Collets	
Standard & Extended-Nose	12
ER-Style Collets	13
ERQC Floating Tap Collets	13
Bar Loader Collets	
FMB	14
LNS	15
Robobar	16
Tool Holders, Collets & Bushings	17
Custom Manufacturing Applications	18
Citizen Adaptive Guide Bushing	19
Citizen Overgrip Collet	19



All the workholding you need for Swiss turning can be ordered from one reliable source...

- **Headstock Collets**
- **Pickoff Collets**
- **Carbide Guide Bushings**
- **Bar Loader Collets**
- **Custom Manufacturing**

Dedicated teams and work cells manufacture to rigid specifications including material and heat treatment, with a process control that leads the industry. Every collet and guide bushing is inspected on a Hardinge SUPER-PRECISION® (.000015" TIR) headstock before reaching the stock room.


Top-of-the-line machine tools and highly-skilled machinists provide exceptional productivity and accuracy. Wire and Ram (EDM) Electrical Discharge Machines produce custom collet shapes, stepped-holes and extended-nose pickoff collets.

Hardinge staffs a team of custom workholding engineers, phone correspondents and support staff, along with dedicated manufacturing cells, for fast and accurate turnaround to meet your custom Swiss turning requirements.

Hardinge and Citizen Machinery America Inc. have partnered to provide overgrip collets and adaptive guide bushings that will add flexibility to the machine and save money in the shop.


PRECISION-MACHINED COLLETS

Hardinge Swiss-type Collets are ground to precise size and TIR to meet precision machining requirements with a standard accuracy that rivals the industry.

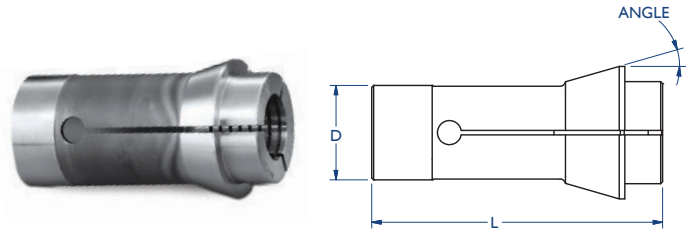

Machine Tool Builder	Collet Model No.	Hardinge Part No.	Head Angle	D Bearing Diameter	L Overall Length	RATED COLLET CAPACITY			
						Round Smooth Min./Max.	Round Serrated Min./Max.	Hex Min./Max.	Square Min./Max.
Tsugami	BS38	4735	15° 15'	.1889" (47.98)	3.937" (100)	.008" to 1.562" (.20 to 39.67)	.078" to 1.562" (1.98 to 14.27)	.250" to 1.344" (6.35 to 34.14)	.250" to 1.093" (6.35 to 27.76)
Tornos	F20-201	4709	15°	.7864" (19.99)	2.126" (54)	.008" to .630" * (.20 to 16.00)	.078" to .630" * (1.98 to 16.00)	.0625" to .545" (1.58 to 13.84)	.0625" to .445" (1.58 to 11.30)
Maier	F32-221	3731	15°	1.260" (32)	2.953" (75)	.062" to 1" (1.58 to 25.4)	.078" to 1" ** (1.98 to 25.4)	.250" to .875" (6.35 to 22.23)	.250" to .687" (6.35 to 17.45)
Peterman, Strohmer, Tornos, Tsugami, Citizen	TF8	4701	15° 35'	.3148" (8)	1.614" (41)	.008" to .250" (.20 to 6.35)	.078" to .250" (1.98 to 6.35)	.0625" to .216" (1.58 to 5.49)	.0625" to .176" (1.58 to 4.47)
Peterman, Strohmer, Tornos, Citizen, Star	TF10	4703	20°	.3935" (10)	1.870" (47.50)	.008" to .281" (.20 to 7.14)	.078" to .281" (1.98 to 7.13)	.0625" to .243" (1.58 to 6.17)	.0625" to .198" (1.58 to 5.03)
Tornos	TF13	4707	16°	.5115" (13)	2.520" (64)	.008" to .394" (.20 to 10.01)	.078" to .394" (1.98 to 10.00)	.0625" to .341" (1.58 to 8.66)	.0625" to .279" (1.58 to 7.09)
Citizen, Maier, Star, Tornos, Tsugami	TF15	4607	16°	.5903" (15)	2.520" (64)	.008" to .500" * (.20 to 12.70)	.078" to .500" * (1.98 to 12.70)	.0625" to .433" (1.58 to 10.99)	.0625" to .353" (1.58 to 8.96)
Citizen, KSI, Hanwha, Tornos	TF16	4609	16°	.6297" (16)	2.520" (64)	.008" to .500" * (.20 to 12.70)	.078" to .500" * (1.98 to 12.70)	.0625" to .433" (1.58 to 10.99)	.0625" to .353" (1.58 to 8.96)
Maier, Star, Tornos, Tsugami, Traub	TF20	4611	16°	.7869" (19.99)	2.638" (67)	.008" to .625" * (.20 to 15.87)	.078" to .625" * (1.98 to 15.87)	.0625" to .541" (1.58 to 13.74)	.0625" to .442" (1.58 to 11.22)
Hanwha	TF22 (#12 Index)	3701	14° 50'	.8642" (21.95)	2.172" (55.17)	.015" to .656" * (.38 to 16.66)	.078" to .625" ** (1.98 to 15.87)	.0625" to .562" (1.58 to 14.27)	.0625" to .469" (1.58 to 11.91)
Tsugami	TF24	4713	15° 20'	.9367" (23.79)	2.440" (62)	.008" to .688" * (.20 to 17.48)	.078" to .688" * (1.98 to 17.48)	.0625" to .595" (1.58 to 15.11)	.0625" to .486" (1.58 to 12.34)
Citizen, Hanwha, Hardinge, KSI, Maier, Star, Tornos, Tsugami, Methods	TF25	4613	16°	.9840" (25)	3.032" (77)	.008" to .813" * (.20 to 20.65)	.078" to .813" * (1.98 to 20.65)	.0625" to .704" (1.58 to 17.88)	.0625" to .574" (1.58 to 14.57)
Citizen, Hanwha, Hardinge, Star, Tornos, Tsugami, Methods	TF30	4615	16°	1.1808" (30)	3.149" (80)	.008" to 1" * (.20 to 25.40)	.078" to 1" * (1.98 to 25.40)	.093" to .866" (2.36 to 21.99)	.093" to .707" (2.36 to 17.95)
Star, Tornos	TF34	4617	16°	1.3382" (34)	3.154" (80.11)	.008" to 1.125" * (.20 to 28.57)	.078" to 1.125" * (1.98 to 28.57)	.093" to .974" (2.36 to 24.73)	.093" to .795" (2.36 to 20.19)
Citizen, Hanwha, KSI, Maier, Star, Tornos, Tsugami, Methods	TF37	4619	16°	1.4563" (37)	3.622" (92)	.008" to 1.265" * (.20 to 32.13)	.078" to 1.250" * (1.98 to 31.75)	.093" to 1.082" (2.36 to 27.48)	.093" to .883" (2.36 to 22.43)
Citizen	TF37SP	4629	16° 7'	1.456" (36.98)	3.622" (92)	.008" to 1.265" (.20 to 32.13)	.078" to 1.250" (1.98 to 31.75)	.093" to 1.082" (2.36 to 27.48)	.093" to .883" (2.36 to 22.43)
Tsugami	TF43	4737	16°	1.693" (43)	3.622" (92)	.008" to 1.500" (.20 - 38.10)	.078" to 1.500" (1.98 to 38.10)	.250" to 1.296" (6.35 to 32.92)	.250" to 1.058" (6.35 to 26.87)
KSI	TF44	0136Y	16.5°	1.732" (44)	3.622" (92)	.200" to 1.490" (5.08 to 25.40)	.078" to 1.490" (1.98 to 37.84)	.250" to 1.250" (6.35 to 31.75)	.250" to .875" (6.35 to 22.23)
Star	TF48 same as B42	3719	14° 50'	1.889" (48)	3.688" (93.68)	.008" to 1.657" * (.20 to 42.09)	.078" to 1.657" ** (1.98 to 42.09)	1/32" to 1 13/32" (.79 to 35.71)	1/32" to 1 5/32" (.79 to 29.36)
Tornos	0161	4711	15°	1.1808" (30)	2.560" (65)	.008" to 1.000" * (.20 to 25.40)	.078" to 1.000" * (1.98 to 25.40)	.093" to .866" (2.36 to 22.00)	.093" to .707" (2.36 to 17.96)
Hardinge	0166	4677	15°	1.259" (32)	2.559" (65)	.008" to 1.125" * (.20 to 28.57)	.078" to 1.125" * (1.98 to 28.57)	.250" to .969" (6.35 to 24.61)	.250" to .797" (6.35 to 20.24)
Hardinge	S16-HMS	4621	15° 40'	.9372" (23.80)	2.441" (62)	.008" to .686" (.20 to 17.42)	.078" to .686" (1.98 to 17.42)	.0625" to .595" (1.58 to 15.11)	.0625" to .486" (1.58 to 12.34)
Hardinge	S20-HM	4623	16°	1.1021" (28)	3.032" (77)	.008" to .813" * (.20 to 20.65)	.078" to .813" * (1.98 to 20.65)	.0625" to .704" (1.58 to 17.88)	.0625" to .574" (1.58 to 14.57)
Hardinge	S25-HM	4625	16°	1.2989" (33)	3.149" (80)	.008" to 1.031" * (.20 to 26.19)	.078" to 1.031" * (1.98 to 26.19)	.093" to .892" (2.36 to 22.65)	.093" to .729" (2.36 to 18.51)
Hardinge	S25-HS	4627	16°	1.1808" (30)	3.149" (80)	.008" to 1" (.20 to 25.4)	.078" to 1.00" (1.98 to 25.4)	.093" to .866" (2.36 to 21.99)	.093" to .707" (2.36 to 17.95)
Nomura	PI6C	4705	13 40'	.0786" (19.96)	2.677" (68)	.008" to .630" (.2 to 16)	.078" to .630" (1.98 / 16)	.062" to .551" (1.57 / 14)	.062" to .445" (1.57 / 11.3)
Nomura	P20C	4717	15	1.023" (25.98)	2.835" (72)	.008" to .813" (.2 to 20.65)	.078" to .813" (1.98 / 20.65)	.062" to .704" (1.57 / 17.88)	.062" to .574" (1.57 / 14.58)
Nomura	P25C	4743	13	1.259" (31.99)	3.346" (84.99)	.008" to 1.065" (.2 to 27.05)	.078" to 1.065" (1.98 to 27.05)	.062" to .923" (1.57 to 23.44)	.062" to .753" (1.57 to 19.13)

Extended-Nose Collets feature added nose length, flat or tapered, for doing pick-off work or to compensate for tooling interferences. Please provide collet model (above), hole size, length of extension (A) required, and nose diameter (B) when ordering. The (B) dimension must be a minimum of .25" larger than the hole size.




SWISS CARBIDE GUIDE BUSHINGS

Hardinge round Swiss Guide Bushings are carbide-lined to keep the stock clean and unmarked. Specials are available in hardened steel, Meehanite lining, angular & zig-zag slotted, extruded shapes, and long bearings.



Machine Tool Builder	Fig.	Guide Bushing Model No.	Hardinge Part No.	Head Angle	D Bearing Diameter	L Overall Length	T Thread Diameter	GUIDE BUSHING CAPACITY		
								Carbide-Lined	Hardened Steel	
								Round Min./Max.	Hexagon Min./Max.	Square Min./Max.
Citizen, Tornos, Peterman	2	0201	4639	30°	.9447" (24)	2.410" (61.21)	M24 x 1	.0625" to .5/8" (1.58 to 15.87)	.125" to .541" (3.17 to 13.74)	.125" to .442" (3.17 to 11.22)
Citizen, Hanwha, Hardinge, KSI, Maier, Tsugami, Star	I	CD25	4651	10°	1.3384" (34)	3.445" (87.5)	M34 x 1	3/32" to 1/32" (2.38 to 26.19)	.093" to .893" (2.36 to 22.68)	.093" to .729" (2.36 to 18.52)
Citizen, Peterman	I	PD4	4675	16°	.3542" (9)	1.727" (44)	M8 x .75	.030" to .188" (.76 to 4.79)	.0625" to .163" (1.58 to 4.14)	.0625" to .133" (1.58 to 3.37)
Hardinge	I	S20HGB	4657	16°	1.1810" (30)	2.756" (70)	M28 x 1	3/32" to 13/16" (2.38 to 17.37)	.125" to .684" (3.17 to 17.37)	.125" to .558" (3.17 to 14.17)
Citizen, Hanwha, KSI, Maier, Tsugami, Bechler, Strohm, Tornos	2	SD125R	4633	30°	.7085" (18)	2.370" (60.20)	M18 x 1	1/32" to 1/2" (.79 to 12.70)	.0625" to .433" (1.58 to 10.99)	.0625" to .353" (1.58 to 8.96)
Star	I	SNC15	4637	12° 30'	.8266" (21)	2.263" (57.5)	M18 x 1	1/32" to 9/16" (.79 to 14.28)	.125" to .487" (3.17 to 12.36)	.125" to .397" (3.17 to 10.08)
Tsugami	I	STM38	4739	16°	1.889" (47.98)	3.220" (81.79)	M46 x 1	1/4" to 1.496" (6.35 to 40)	1/4" to 1.295" (6.35 to 32.89)	1/4" to 1.058" (6.35 to 26.87)
Tornos	3	T-200	4719	20° 5'	1.3383" (34)	5.920" (150.36)	M32 x 1.5	.1093" to 1.000" (2.77 to 25.40)	.1875" to .866" (4.76 to 21.99)	.1875" to .707" (4.76 to 17.95)
Citizen, Tornos (CAM), Tsugami	I	TD7	4679	16°	.4329" (11)	2.120" (53.85)	M10 x .75	.030" to .250" (.76 to 6.35)	.0625" to .219" (1.59 to 5.56)	.0625" to .177" (1.59 to 4.5)
Citizen, Star, Tornos, Bechler	I	TD10	4631	16°	.6298" (16)	2.377" (60.37)	M14 x 1	1/32" to 13/32" (.79 to 10.31)	.0625" to .351" (1.58 to 8.91)	.0625" to .287" (1.58 to 7.28)
Tsugami, Tornos	I	TD20	4635	16°	.8660" (22)	2.686" (68.22)	M19 x 1	1/16" to 17/32" (1.58 to 13.49)	.0625" to .460" (1.58 to 11.68)	.0625" to .375" (1.58 to 9.52)
Maier, Star, Tsugami, Traub	I	TD20R	4641	16°	.8660" (22)	2.686" (68.22)	M22 x 1	1/16" to 5/8" (1.58 to 15.87)	.0625" to .541" (1.58 to 13.74)	.0625" to .442" (1.58 to 11.22)
Tsugami, Tornos, Bechler	2	TD25	4647	30°	1.1022" (28)	3.228" (82)	M25 x 1	3/32" to 25/32" (2.38 to 19.84)	.125" to .649" (3.17 to 16.48)	.125" to .530" (3.17 to 13.46)
Maier, Hardinge, Star	I	TD25S	4649	16°	1.1022" (28)	3.228" (82)	M25 x 1	3/32" to 25/32" (2.38 to 20.02)	.125" to .649" (3.17 to 16.48)	.125" to .530" (3.17 to 13.46)
Citizen, Hanwha, KSI	I	TD25NS	4659	16°	1.1022" (28)	3.228" (82)	M25 x 1	.0900" to 25/32" (2.28 to 19.84)	.125" to .649" (3.17 to 16.48)	.125" to .530" (3.17 to 13.46)
Tsugami/Tornos	I	TD26	4733	16°	1.0236" (26)	3.031" (76.99)	M25 x 1	1/16" to .781" (1.58 to 19.84)	1/16" to .676" (1.58 to 17.17)	1/16" to .552" (1.58 to 14.02)
Citizen, Maier, Tsugami, Tornos	2	TD32	4653	20° 40'	1.6526" (41.29)	3.220" (81.79)	M40 x 1	3/16" to 17/64" (4.76 to 32.15)	.250" to 1.0826" (6.35 to 27.50)	.250" to .883" (6.35 to 22.42)
Hanwha, KSI, Star, Tornos	I	TD32S	4655	16°	1.6526" (41.29)	3.232" (82.09)	M40 x 1	3/16" to 17/64" (4.76 to 32.15)	.250" to 1.0826" (6.35 to 27.50)	.250" to .883" (6.35 to 22.42)
KSI	3	TD38	O/A	16°	1.811" (46)	3.622" (92)	M45 x 1	1/4" to 17/16" (6.35 to 36.50)	.250" to 1.250" (6.35 to 31.75)	.250" to 1.000" (6.35 to 25.40)
Citizen, Tornos	2	TSD20	4645	30°	1.2597" (32)	2.805" (71.24)	M32 x 1	.060" to 13/16" (1.52 to 20.63)	.125" to .703" (3.17 to 17.85)	.125" to .574" (3.17 to 14.57)
Hardinge, Tsugami	I	TSG-20R	4643	16°	.9054" (23)	2.835" (72)	M22 x 1	.030" to 11/16" (.76 to 17.46)	.0625" to .595" (1.58 to 15.11)	.0625" to .486" (1.58 to 12.34)
Nomura	I	PI6D	4715	15 30'	0.866" (22.00)	2.756" (70.00)	M20 X 1	.060" to .590" (1.5 to 15)	.062" to .512" (1.57 to 13)	.062" to .417" (1.57 to 10.6)
Nomura	I	P20D	4741	15 30'	1.181" (30)	2.677" (68)	M30 X 1	.090" to .813" (2.3 to 20.65)	.062" to .750" (1.57 to 19.05)	.062" to .625" (1.57 to 15.88)
Nomura	I	P25D	4745	13	1.417" (36)	3.543" (90)	M36 X 1	.090" to 1" (2.3 to 25.4)	.062" to .866" (1.57 to 22)	.062" to .707" (1.57 to 17.96)

Note: Millimeters in parentheses ()

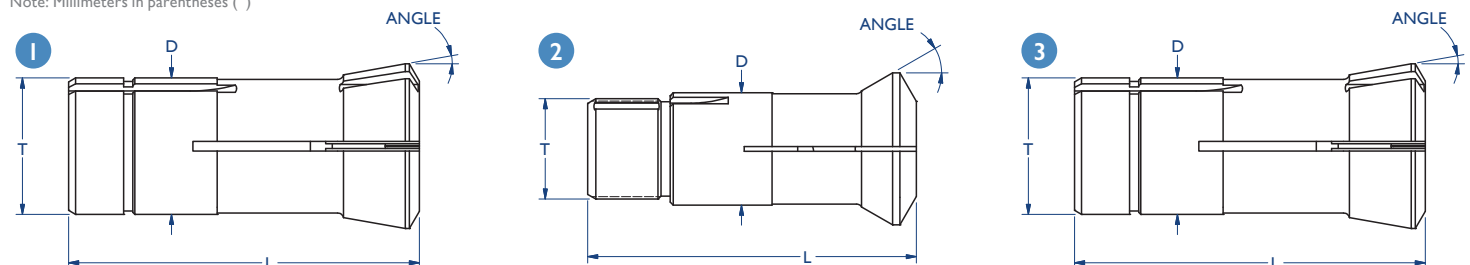

MACHINE TOOL BUILDERS' REFERENCE

Citizen®

Machine Builders' Model No.	HEADSTOCK COLLET		CARBIDE BUSHING		ADAPTIVE	PICK-OFF COLLET		DRILL SLEEVE COLLET		ROTARY TOOL COLLET	
	Collet Model No.	Hardinge Part No.	Bushing Model No.	Hardinge Part No.	Guide Bushing*	Collet Model No.	Hardinge Part No.	Collet Model No.	Hardinge Part No.	Collet Model No.	Hardinge Part No.
A16	TF20	4611	O201	4639	—	TF20	4611	ER11	1911	ER11	1911
A20 / 20VI	TF25	4613	TD25NS	4659	97Z-1102	TF25	4613	ER11 ER16	1911 1913	ER16	1913
A32	TF37SP	4629	TD32	4653	97Z-1653	TF37SP	4629	ER16	1913	ER16	1913
B12	TF16	4609	SD125R	4633	—	—	—	TF8 ER11	4701 1911	ER11	1911
B12 I	TF16	4609	SD125R	4633	—	—	—	ER11	1911	—	—
B12 II	TF16	4609	SD125R	4633	—	—	—	ER11	1911	ER8	2093
B12 V	TF16	4609	SD125R	4633	—	TF16	4609	ER11	1911	—	—
B12 VI	TF16	4609	SD125R	4633	—	TF16	4609	ER11	1911	ER8	2093
BL12	BL12	OA	—	—	—	—	—	ER11 ER16	1911 1913	—	—
B20	TF25	4613	TD25NS	4659	—	TF25	4613	TF8 ER11	4701 1911	ER11	1911
B20 I	TF25	4613	TD25NS	4659	—	—	—	ER16	1913	—	—
B20 V	TF25	4613	TD25NS	4659	—	TF25	4613	ER16	1913	—	—
BL25	TF48	3719	—	—	—	TF30	4615	ER11 ER16	1911 1913	ER11	1911
C16	TF20	4611	O201	4639	—	TF20	4611	ER11	1911	ER11	1911
C32	TF37SP	4629	TD32	4653	—	TF37SP	4629	ER16	1913	ER16	1913
D10	TF15	4607	TD10	4631	—	—	—	TF8	4701	—	—
D16	TF25	4613	TP20	OA	—	—	—	TF12	OA	—	—
E16	TF25	4613	O201	4639	—	TF25	4613	ER16	1913	ER11	1911
E16J	TF25	4613	O201	4639	—	TF25	4613	TF8 ER16	4701 1913	0136 ER11	OA 9311
E216	TF25	4613	O201	4639	—	TF25	4613	ER16	1913	ER16	1913
E220	TF25	4613	TSD20	4645	—	TF25	4613	ER16	1913	ER16	1913
E225/25J	TF30	4615	CD25	4651	—	TF30	4615	ER16	1913	ER16	1913
E32	TF37SP	4629	TD32	4653	—	TF37SP	4629	ER16	1913	ER16	1913
E32 IV	TF37SP	4629	TD32	4653	—	TF37SP	4629	ER16	1913	ER11 ER16	OA 1913
E32K	TF37	4619	TD32	4653	—	TF37	4619	TF10 ER16	4703 1913	ER16	1913
E232	TF37	4619	TD32	4653	—	TF37	4619	ER16	1913	ER16	1913
F10	TF15	4607	TD10	4631	—	—	—	TF8	4701	—	—
F12	TF16	4609	SD125R	4633	—	TF16	4609	TF8 ER16	4701 1913	0136	OA
F16	TF25	4613	O201	4639	—	TF25	4613	TF8 ER16	4701 1913	0136	OA
F20	TF25	4613	TSD20	4645	—	TF25	4613	TF10 ER16	4703 1913	TF8 ER16	4701 1913
F25	TF30	4615	CD25	4651	—	TF30	4615	TF10 ER16	4703 1913	TF8 ER16	4701 1913
FL32	TF37SP	4629	—	—	—	TF37SP	4629	ER20 ER25	1915 2095	ER11/16/20	1911/13/15
FL42	TF48	3719	—	—	—	TF48	3719	—	—	—	—
G16	TF25	4613	O201	4639	—	—	—	TF8	4701	—	—
G32	TF37SP	4629	TD32	4653	—	TF37SP	4629	—	—	—	—
K16	TF20	4611	O201	4639	—	TF20	4611	ER11 ER16	1911 1913	ER11	1911
L10	TF15	4607	TD10	4631	—	TF8	4701	TF8	4701	TF8	4701
L12	TF16	4609	SD125R	4633	—	TF16	4609	TF8 ER11	4701 1911	ER11	1911
L16	TF25	4613	O201	4639	—	—	—	TF8 ER16	4701 1913	—	—
L16 V	TF25	4613	O201	4639	—	TF25	4613	TF8 ER16	4701 1913	—	—
L16 VI	TF25	4613	O201	4639	—	TF25	4613	TF8 ER16	4701 1913	ER16	1913
L20	TF25	4613	TD25NS	4659	—	TF25	4613	ER16	1913	ER16	1913
L20 I/ III	TF25	4613	TD25NS	4659	—	—	—	ER16	1913	ER11 ER16	OA 1913
L20VII	TF25	4613	TD25NS	4659	—	TF25	4613	ER16	1913	ER11 ER16	OA 1913
L25	TF30	4615	CD25	4651	—	TF30	4615	ER16	1913	ER16	1913
L32	TF37SP	4629	TD32	4653	—	TF37SP	4629	ER16	1913	ER16	1913
L520/720	TF25	4613	TD25NS	4659	97Z-1102	TF25	4613	ER16	1913	ER16	1913
M12	TF16	4609	SD125R	4633	—	TF16	4609	ER11 ER16	1911 1913	TF8 ER16	4701 1913
M16	TF20	4611	O201	4639	—	TF20	4611	ER11 ER16	1911 1913	TF8 ER11	OA 4701
M20	TF25	4613	TD25NS	4659	97Z-1102	TF25	4613	TF8 ER16	4701 1913	0136 ER11	TF8 ER16
M32	TF37SP	4629	TD32	4653	97Z-1653	TF37SP	4629	ER16	1913	ER11 ER16	OA 1913
R04	TF8	4701	PD4	4675	—	TF8	4701	ER8	2093	ER8	2093
R07	TF15	4607	TD7	4679	—	TF15	4607	ER8	2093	ER8	2093

* Adaptive guide bushings permit the use of non-ground stock. Machine kit required from Citizen. OA = On Application (may be available as a special order)

Hardinge®

Machine Builders' Model No.	HEADSTOCK COLLET		CARBIDE BUSHING		SUB-SPINDLE COLLET		TOOL HOLDER COLLET			
	Collet Model No.	Hardinge Part No.	Bushing Model No.	Hardinge Part No.	Collet Model No.	Hardinge Part No.	Collet Model No.	Hardinge Part No.	Collet Model No.	Hardinge Part No.
ST16/216	S16-HMS	4621	TSG20R	4643	S16HMS	4621	ER11	ER16	1911	1913
ST20/220	S20-HM	4623	S20HGB	4657	TF25	4613	ER16	ER20	1913	1915
ST25/225	S25-HM	4625	CD25	4651	S25-HS	4627	ER16	ER20	1913	1915

Note: Adapter sleeves for other Swiss collets and guide bushings are available for Hardinge lathes on application

MACHINE TOOL BUILDERS' REFERENCE

Hanwha

Machine Builders' Model No.	HEADSTOCK COLLET		CARBIDE BUSHING		PICK-OFF COLLET		TOOL HOLDER COLLET			
	Collet Model No.	Hardinge Part No.	Bushing Model No.	Hardinge Part No.	Collet Model No.	Hardinge Part No.	Collet Model No.		Hardinge Part No.	
HANEX 25	TF30	4615	CD25	4651	TF30	4615	ER11	ER16	1911	1913
ML12S	TF16	4609	SD125R	4633	TF16	4609	ER11		1911	
ML20H(18H)	TF25	4613	TD25-NS	4659	TF25	4613	ER11	ER16	1911	1913
ML20S(18S)	TF25	4613	TD25-NS	4659	TF25	4613	ER11	ER16	1911	1913
ML26H	TF30	4615	CD25	4651	TF30	4615	ER11	ER16	1911	1913
ML26S	TF30	4615	CD25	4651	TF30	4615	ER11	ER16	1911	1913
SL12S/H	TF16	4609	SD125R	4633	TF16	4609	ER11	ER16	1911	1913
SL12SE	TF16	4609	SD125R	4633	TF16	4609	ER11	ER16	1911	1913
SL20H	TF25	4613	TD25-NS	4659	TF25	4613	ER11	ER16	1911	1913
SL20HP	TF25	4613	TD25-NS	4659	TF25	4613	ER11	ER16	1911	1913
SL20S	TF25	4613	TD25-NS	4659	TF25	4613	ER11	ER16	1911	1913
SL26H	TF30	4615	CD25	4651	TF30	4615	ER11	ER16	1911	1913
SL26HP	TF30	4615	CD25	4651	TF30	4615	ER11	ER16	1911	1913
SL26S	TF30	4615	CD25	4651	TF30	4615	ER11	ER16	1911	1913
SL32HP	TF37	4619	TD32S	4655	TF37	4619	ER16		1913	
SL35HP	F40-SL35	O/A	TD35	O/A	F40-SL35	O/A	ER11	ER16	1911	1913
SL35	F40-SL35	O/A	TD45	O/A	F40-SL35	O/A	ER11	ER16	1911	1913
XPI6	TF22 (#12 Index)	3701	TD20R/16	O/A	TF22	3701	ER11	ER16	1911	1913
XD12H	TF16	4609	SD125R	4633	TF16	4609	ER11		1911	
XD20	TF25	4613	TD25-NS	4659	TF25	4613	ER11	ER16	1911	1913
XD26H	TF30	4615	CD25	4651	TF30	4615	ER16		1913	
XD32H	TF37	4619	TD32	4653	TF37	4619	ER11/ER16		1911/1913	
XD42	—	6855Y	—	6853Y	—	—	ER20		1915	

KSI

Machine Builders' Model No.	HEADSTOCK COLLET		CARBIDE BUSHING		PICK-OFF COLLET		TOOL HOLDER COLLET	
	Collet Model No.	Hardinge Part No.	Bushing Model No.	Hardinge Part No.	Collet Model No.	Hardinge Part No.	Collet Model No.	Hardinge Part No.
SA12	TF16	4609	SD125R	4633	TF16	4609	ER11	1911
SA20/SM20	TF25	4613	TD25-NS	4659	TF25	4613	ER16	1913
SA26	F32-221	3731	CD25	4651	F32-221	3731	ER16	1913
SA32	TF37	4619	TD32S	4655	TF37	4619	ER16	1913
SA38	TF44	OA	TD38	OA	TF37	4619	ER16	1913
SQC20	TF25	4613	TD25-NS	4659	TF25	4613	ER16	1913
SQC32	TF44	OA	TD32S	4655	TF37	4619	ER16	1913
SQC38	TF48	3719	TD38	OA	TF44	OA	ER16	1913

Maier

Machine Builders' Model No.	HEADSTOCK COLLET		CARBIDE BUSHING		PICK-OFF COLLET		TOOL HOLDER COLLET	
	Collet Model No.	Hardinge Part No.	Bushing Model No.	Hardinge Part No.	Collet Model No.	Hardinge Part No.	Collet Model No.	Hardinge Part No.
ML-12A/12B	TF15	4607	SD125R	4633	TF15	4607	ER11	1911
ML-12C/12D	TF15	4607	SD125R	4633	TF15	4607	ER11	1911
ML-16A/16B	TF20	4611	TD20R	4641	TF20	4611	ER11	1911
ML-16C/16D	TF20	4611	TD20R	4641	TF20	4611	ER11	1911
ML-20A/20B	TF25	4613	TD25S	4649	TF25	4613	ER16	1913
ML-20C/20D	TF25	4613	TD25S	4649	TF25	4613	ER16	1913
ML-20E	TF25	4613	TD25S	4649	TF25	4613	ER16	1913
ML-26A/26B	F32-221	3731	CD25	4651	F32-221	3731	ER16	1913
ML-26C/26D	F32-221	3731	CD25	4651	F32-221	3731	ER16	1913
ML-26E	F32-221	3731	CD25	4651	F32-221	3731	ER16	1913
ML-32A/32B	TF37	4619	TD32S	4655	TF37	4619	ER16	1913
ML-32C/32D	TF37	4619	TD32S	4655	TF37	4619	ER16	1913
ML-32E	TF37	4619	TD32S	4655	TF37	4619	ER16	1913
MLK-32	TF37	4619	TD32S	4655	TF37	4619	ER16	1913

Note: OA = On Application (may be available as special order)

Star

Note: OA = On Application (may be available as special order)

SWISTEK

Note: Adapter sleeves for other Swiss collets and guide bushings are available for Hardinge lathes on application.

MACHINE TOOL BUILDERS' REFERENCE

Tornos - CNC

Machine Builders' Model No.	HEADSTOCK COLLET				CARBIDE BUSHING		PICK-OFF COLLET				DRILL SLEEVE COLLET				CROSS DRILL COLLET			
	Collet Model No.		Hardinge Part No.		Bushing Model No.	Hardinge Part No.	Collet Model No.		Hardinge Part No.		Collet Model No.		Hardinge Part No.		Collet Model No.		Hardinge Part No.	
DECO 2000 10	TF13		4707		TD10	4631	TF13		4707		ER11	ER12	1911	2091	ER11	ER12	1911	2091
DECO 2000 13	F20-201		4709		0201	4639	TF20-201		4709		ER11	ER12	1911	2091	ER11	ER12	1911	2091
DECO 2000 20	TF25		4613		TD25-167	OA	TF25		4613		ER11	ER12	1911	2091	ER11	ER12	1911	2091
DECO 2000 25/32	TF37		4619		TD32S	4655	TF37		4619		ER11	ER12	1911	2091	ER11	ER12	1911	2091
DECO 2000 1"	0161		4711		CD25	4651	0161		4711		ER11	ER12	1911	2091	ER11	ER12	1911	2091
Delta 20/5	TF25		4613		TD25	4647												
Delta 20/5 DD	TF25		4613		TD26	OA												
DT26	0161		4711		CD25	4651												
Elector16	F20-201		4709		0201	4639	—		—		AE4402		OA		WJ#3		OA	
ENC16	F20-201		4709		0201	4639	F20-201		4709		—		—		—		—	
ENC162	TF15	F20-201	4607	4709	0201	4639	—		—		ER16	ER25	1913	2095	WJ#3		OA	
ENC164	TF15	F20-201	4607	4709	0201	4639	TF15	F20-201	4607	4709	ER16	ER25	1913	2095	WJ#3		OA	
ENC167	TF25		4613		TD25/167	OA	TF25		4613		ER12 /16/20		2091/1913/15		ER12/16/20		2091/1913/15	
ENC74	TF13		4707		TD10	4631	TF13		4707		ER12		2091		ER12		2091	
ENC262	TF25	0161	4613	4711	T200	4719	TF25	0161	4613	4711	ER16	ER25	1913	2095	ER25		2095	
ENC264	TF25	0161	4613	4711	T200	4719	TF25	0161	4613	4711	ER16	ER25	1913	2095	ER25		2095	
DT26	0161		4711		CD25	4651												
GT32	TF37		4619		TD32S	4651												
TOP-100	TF16		4609		TD10TXP TD18TXP	OA OA	TF13		4707		ER16	ER25	1913	2095	ER12	ER25	2091	2095
TOP-200	0161		4711		T200	4719	TF25	0161	4613	4711	ER16/20/25		1913/15/2095		ER20	ER25	1915	2095
TMB26	F32-221		3731		SD255-36	OA	—		—		ER25	ER32	2095	1917	ER20		1915	
M10	TF15		4607		TD10/125	OA	—		—		—		—		—		—	
M20	TF25		4613		TD25TS	OA	—		—		—		—		—		—	
M25/28	TF34		OA		TD25TS	OA	—		—		—		—		—		—	
MR32	TF37		4619		TD32	OA	—		—		—		—		—		—	
R10	TF15		4607		TD10/125	OA	—		—		—		—		—		—	
R125	TF16		4609		TD10/125	OA	—		—		—		—		—		—	
R20/RR20	TF25		4613		TD25TS	OA	—		—		—		—		—		—	

Traub

Machine Builders' Model No.	HEADSTOCK COLLET		CARBIDE BUSHING		PICK-OFF COLLET		STATIONARY COLLET				ROTATING COLLET			
	Collet Model No.	Hardinge Part No.	Bushing Model No.	Hardinge Part No.	Collet Model No.	Hardinge Part No.	Collet Model No.	Hardinge Part No.	Collet Model No.	Hardinge Part No.	Collet Model No.	Hardinge Part No.	Collet Model No.	Hardinge Part No.
TNL-12	TF16	4609	TRB468	OA	TF16	4609	ER11	ER16	1911	1913	ER11	ER16	1911	1913
TNL-16G	TF20	4611	TD20R	4641	TF20	4611	ER11	ER16	1911	1913	ER11	ER16	1911	1913
TNL-16G	0156	OA	TD25S	4649	0156	OA	ER11	ER16	1911	1913	ER11	ER16	1911	1913
TNL-26	TF30	4615	TRB761	OA	TF30	4615	ER11	ER16	1911	1913	ER11	ER16	1911	1913
TNL32	TF37	4619	TD32S	4655										

NexTurn

Machine Builders' Model No.	HEADSTOCK COLLET		CARBIDE BUSHING		PICK-OFF COLLET			STATIONARY COLLET				ROTATING COLLET				
	Collet Model No.	Hardinge Part No.	Bushing Model No.	Hardinge Part No.	Collet Model No.	Hardinge Part No.		Collet Model No.		Hardinge Part No.		Collet Model No.		Hardinge Part No.		
SA12/12A	TF16	4609	SD125R	4633	TF16	4609		ER11		1911		ER11		1911		
SA18A	TF25	4613	TD25NS	4659	TF25	4613		ER11	ER16	1911	1913	ER11	ER16	1911	1913	
SA20/20E	TF25	4613	TD25NS	4659	TF25	4613		ER16		1913		ER16		1913		
SA26/26E	F32-221	3731	CD25	4651	F32-221	3731		ER16		1913		ER16		1913		
SA32	TF37	4619	TD32S	4655	TF37	4619		ER16		1913		ER16		1913		
SA38	TF44	OA	TD38	OA	TF37	TF44	4619	OA	ER16		1913		ER16		1913	

Note: OA = On Application (may be available as special order)

Nomura

	Headstock Collet		Carbide Bushing		Pick-Off Collet		Toolholder Collet	
Model	Collet	Part No.	Bushing	Part No.	Collet	Part No.	Collet	Part No.
NNI6	PI6C	4705	PI6D	4715	PI6C	4705	ER11 / ER16	1911 / 1913
NN20U	P25C	4743	P25D	4745	P20C	4717	ER11 / ER16	1911 / 1913
NN20J	P20C	4717	P20D	4741	P20C	4717	ER11 / ER16	1911 / 1913
NN25	P25C	4743	P25D	4745	P25C	4743	ER11 / ER16	1911 / 1913
NN30TC	P30	4751						

MACHINE TOOL BUILDERS' REFERENCE

Tsugami

Machine Builders' Model No.	REM Model No.	HEADSTOCK COLLET		CARBIDE BUSHING		SUB-SPINDLE COLLET		TOOL HOLDER COLLETS						
		Collet Model No.	Hardinge Part No.	Bushing Model No.	Hardinge Part No.	Collet Model No.	Hardinge Part No.	Cross Drill		Face Drill		Hi-Speed Drill	Cross Tap	Vertical Drill
BA26	BA26	0166	4677	TD33	OA	0166	4677	ER16		ER16		—	—	—
BE12/I2 III	BE12/I2 III	TF24	4713	TSG20R	4653	TF24	4713	ER11	ER16	ER11	ER16	—	—	—
BE19	BE19	TF25	4613	TD25	4647	TF25	4613	ER11	ER16	ER11		—	—	—
BE20 III	BE20 III	TF25	4613	TD25	4647	TF25	4613	ER16	ER20	—		—	—	—
BE20V	BE20V	TF25	4613	TD25	TD26 ^E	4647	4733	TF25	4613	ER16	ER20	—	—	—
BF20/BN/BW	BF20/BN/BW	TF25	4613	TD25	4647	TF25	4613	—		—		—	—	—
BH20	BH20	TF25	4613	TD25	TD26 ^E	4647	4733	TF25	4613	—		ER11	ER16	—
BH38/BU38	BH38/BU38	TF43	4737	STM38	4739	BS38	4735	various		various		various	various	various
BO07	B007	TF10	4703	TD7	4679	TF10	4703	ER11		ER11		—	—	—
BO125/I26	B0125/B0126	TF24	4713	TSG20R/—	4653/—	TF24	4713	ER11	ER16	ER11	ER16	—	—	—
BO205/206	B0205	TF25	4613	TD26	4733	TF25	4613	ER16	ER20	ER16	ER20	—	—	—
BS12/B0/BN	BX12	TF24	4713	TSG20R	4643	TF24	4713	ER16	ER20	ER11		—	—	—
BS12III / BO12III	BZ12	TF24	4713	TSG20R	4643	TF24	4713	ER16	ER20	ER11		—	—	—
BS12V / BO12V	BS12V / BO12V	TF24	4713	TSG20R	4643	TF24	4713	ER16	ER20	ER11		—	—	—
BS18/BO18	BX18	TF24	4713	TSG20R	4643	TF24	4713	ER11		ER11		—	—	—
BS19	BS19	TF25	4613	TD25	4647	TF25	4613	ER11		ER11		—	—	—
BS20A/B/C	SX20A/B/C	TF25	4613	TD25	4647	TF25	4613	ER16	ER20	—		—	—	—
BS20V/SS20	BS20V/SS20	TF25	4613	TD25	4647	TF25	4613	ER16	ER20	—		—	—	—
BS26/BU26	SX26/BU26	0166	4677	CD25	4651	0166	4677	ER16	ER20	ER16	ER20	—	—	—
BS32	BS32	BS32C	1048V	BS32B	1049V	BS32C	OA	ER16	ER20	ER11		—	—	—
BU20	BU20	TF25	4613	TD25	4647	TF25	4613	—		ER11	ER16	—	—	—
BW07	BW07	TF10	4703	TD7	4679	TF10	4703	ER11		ER11		—	—	—
BW12/BU12	BW12/BU12	TF24	4713	TSG20R	4643	TF24	4733	ER16	ER20	ER11	ER16	—	—	—
MB35	MB35	I6C	I717	—	—	—	—	—		—		—	—	—
MB38, 38S/4	MB38S/4	I6C	I717	—	—	BS38	4735	—		—		—	—	—
MU26S/SY	MU26S/SY	0166	4677	CD25	4651	0166	4677	various		various		various	various	various
MU38/BU38	MU38/BU38	TF43	4737	STM38	4739	BS38	4735	I6C		I717		—	—	—
NMPI6II	ST600MARKII	TF20	4611	TD25	4647	TF20	4611	—		—		—	—	—
NP11	ST400P	TF15	4607	SDI25R	4633	TF15	4607	—		ER12		—	—	—
NP16/I6 II	ST600P	TF20	4611	TD25	4647	TF20	4611	ER12	ER12	ER12	TF8/4701	TF8/4701	ER16	—
NP17	ST700P	TF24	4713	TSG20R	4643	TF24	4713	ER12	ER12	ER12		—	—	—
NP20/20 I	ST800P	TF25	4613	TD25	4647	TF25	4613	ER16	ER16		—	—	—	ER16
NP20 II	ST800MARKII	TF25	4613	TD25	4647	TF25	4613	—		—		—	—	—
NP20 III	NP20III	TF25	4613	TD25	4647	TF25	4613	ER16	ER16		—	—	—	ER16
NP32	STI250P	TF37	4619	TD32	4653	—	—	ER16	ER16		—	—	—	ER16
NP32 II	STI250MARKII	TF37	4619	TD32	4653	TF37	4619	ER16	ER16		—	—	—	ER16
NP32 III	NP32 III	TF37	4619	TD32	4653	TF37	4619	ER16	ER16		—	—	—	ER16
NT11	ST400	TF15	4607	SDI25R	4633	—	—	—		—		—	—	—
NT11S	NT11S	TF15	4607	SDI25R	4633	—	—	—		—		—	—	—
NT12	ST500	TF20	4611	TD20	TD20R	4635	4641	—	—	ER12	ER12	TF8/4701	TF8/4701	ER16
NT16 II/I6 III	ST600	TF20	4611	TD25	4647	—	—	ER12		ER12		TF8/4701	TF8/4701	ER12
NT17	ST700	TF24	4713	TSG20R	4643	—	—	—		—		—	—	—
NT17S	NT17S	TF24	4713	TSG20R	4643	—	—	—		—		—	—	—
NT20	ST800	TF25	4613	TD25	4647	—	—	ER16	ER16		—	—	—	ER16
NT25	ST1000	TF37	4619	TD32	4653	—	—	ER16	ER16		—	—	—	ER16
NT32/ II/ III	STI250	TF37	4619	TD32	4653	—	—	ER16	ER16		—	—	—	ER16
SI6D/H/P	SI6D/H/P	TF24	4713	TSG20R	4643	TF24	4713	ER12	ER12		—	—	—	—
S20	S20	TF25	4613	TD25	4647	—	—	—		—		—	—	—
S20D/S20H	S20D/S20H	TF25	4613	TD25	4647	TF25	4613	ER16	ER16		—	—	—	—
S20P	S20P	TF25	4613	TD25	4647	TF25	4613	—		—		—	—	—
S25	S25	TF30	4615	CD35	OA	TF30	4615	—		—		—	—	—
S25D/H/P	S25D/H/P	0166	4677	CD25	4651	0166	4677	ER16		ER16		—	—	—
S205/06/07	S205/06/07	TF25	4613	TD25	TD26 ^E	4647	4733	TF25	4613	ER11	ER16	ER16	—	—
SS20/532	SS20/532	TF25	4613	TD25	4647	TF25	4613	MPC16/20		—		—	—	—
SS20/20M	SS20	TF25	4613	TD25/—	4647/—	TF25	4613	ER16	ER20	ER16		—	—	—
SS26, BO26SII, BO266II	SS26	0166	4677	CD25	4651	0166	4677	ER11	ER16	ER16		—	—	—
SS32, BO32SII, 326II, 327II	SS32	TF37	4619	TD32	4653	TF37	4619	ER16	ER20	ER16		—	—	—
SX20A	SX20A	TF25	4613	TD25	4647	TF25	4613	—		ER16		—	—	—
SX20B/20C	SX20B/20C	TF25	4613	TD25	4647	TF25	4613	ER16		ER16		—	—	—
TMUI/R/BO385	TMUI/R/—	TF43	4737	STM38	4739	BS38	4735	various		various		various	various	various
600	TF20	4611	TD25	4647	—	—	—	—		—		—	—	—
600P	TF20	4611	TD25	4647	—	TF20	4611	—		—		—	—	—

ER11 Hardinge Part No: 1911, ER16 Hardinge Part No: 1913, ER20 Hardinge Part No: 1915, ER12 On Application OA = On Application (may be available as a special order) E = Electronic

MACHINE TOOL BUILDERS' REFERENCE

Cam-Operated Lathes

Bechler

Machine Builders' Model No.	COLLET		CARBIDE DRAW BUSHING	
	Collet Model No.	Hardinge Part No.	Bushing Model No.	Hardinge Part No.
A/AS/AR-10	OA	OA	TD10	4631
A/AS/AR-10	OA	OA	SD125	OA
A/AS/AR-10	OA	OA	SD125R	4633
A/AS/AR-10	OA	OA	BD10	OA
B/BR-20	OA	3122R	TD25	4647

Note: Collets for Bechler Lathes are special order

Strohm

Machine Builders' Model No.		COLLET - RD / HEX / SQ		CARBIDE GUIDE BUSHING	
Headstock	Attachments	Collet Model No.	Hardinge Part No.	Bushing Model No.	Hardinge Part No.
—	M45	TF5	OA	—	—
—	M125	TF5	OA	—	—
M45	—	—	—	TSD4	OA
M45	M105	TF8	4701	0100	OA
—	M125	TF8	4701	—	—
M75	—	TF10	4703	TSD7	OA
M125	M205	TF15	4607	SD125R	4633
M105	M255	TF15	4607	—	—
M125	—	TF15R	OA	SD125R-16	OA
M205	—	TF25	4613	SD205	OA
M255	—	TF30	4615	SD255	OA

Methods

Machine Builders' Model No.	COLLET - RD / HEX / SQ		CARBIDE DRAW BUSHING	
	Collet Model No.	Hardinge Part No.	Bushing Model No.	Hardinge Part No.
SS20	TF25	4613	TSD20	4645
SS25	TF30	4615	TD25	4647
SS32	TF37	4619	TD32	4653

Tornos

Machine Builders' Model No.		COLLET		CARBIDE GUIDE BUSHING	
Headstock	Attachments	Collet Model No.	Hardinge Part No.	Bushing Model No.	Hardinge Part No.
—	M7 • R10/R125	TF6	0258C	—	—
—	R10/R125	TF7	OA	—	—
M4	M7 • R10/R125	TF8	4701	TD4 TSD4	OA OA
M7	M15 • R16	TF10	4703	TD7 TSD7	OA OA
—	M15 • R16/20	TF12	OA	—	—
MS7	M7 • CT.HSK.	TF13	4707	—	—
M20	—	TF25	4613	TD25 TSD20	4647 4645
M10	—	—	—	TD10 SD125R-16	4631 OA
M15 M15	—	TF20	4611	TD20 TSD15	4635 OA
M25/28	—	TF34	4617	TD25	4647
MR32	—	TF37	4619	TD32	4653
R10	—	TF15	4607	TD10 SD125R SD125R-16	4631 4633 OA
R16	—	TF20	4611	TD20 TSD15	4635 OA
R20	—	TF25	4613	TD25 TD20	4647 4635
RR20	—	TF25	4613	TD25 TD20 TSD20	4647 4635 4645
R125	M20/25/28, MR32	TF16	4609	TD10 SD125R SD125R-16	4631 4633 OA

Note: OA = On Application (may be available as a special order)

Peterman

Machine Builders' Model No.		STEEL COLLET		CARBIDE GUIDE BUSHING	
Headstock	Attachments	Collet Model No.	Hardinge Part No.	Bushing Model No.	Hardinge Part No.
—	P4	0131	OA	0100	OA
—	P4	—	—	PD4	4675
P0/P3	P7	0136	OA	—	—
P4	P7R	TF8	4701	—	—
P7	P10 P16	TF10 TF10	4703 4703	TD7	4679
P7R	—	0146	OA	—	—
P10	P16	0147	OA	—	—
—	P25	0147	OA	—	—
P10R	P16	0151	OA	—	—
—	P25	0151	OA	—	—
P16	—	0152	OA	0201	4639
2A	—	0156	OA	—	—
P25	—	0166	4677	0200	OA

CROSS REFERENCE GUIDE

Collets

Hardinge Model Number	Hardinge Part Number	Southwick & Meister Model Number	KEB (MasWerks) Model Number	Schaublin Model Number
BS38	4735	BS38	—	—
F18-579	OA	F18-579	—	F18
F20-20I	4709	F20-20I	MC20-20I	F20
F32-22I	373I	F32-22I	MC32-22I	F32
TF8	470I	TF8	MC8	F8
TF10	4703	TF10	MC10	F10
TF12	OA	TF12	MC12	F12
TF13	4707	TF13	MC13	F13
TF15	4607	TF15	MC15	F15
TF16	4609	TF16	MC16	F16
TF20	461I	TF20	MC20	F20
TF22 (#12 Index)	370I	TF22	—	F22
TF24	4713	TF24	MC24	—
TF25	4613	TF25	MC25	F25
TF30	4615	TF30	MC30	F30
TF34	4617	TF34	MC34	F34
TF37	4619	TF37	MC37	F37
TF37SP	4629	TF37SP	—	—
TF43	4737	TF43	—	—
TF44	OA	TF44	MC44	—
TF48 (B42)	3719	TF48	MC48	F48
0I36	OA	0I36	0I36	F7
0I6I	471I	0I6I	MC0I6I	—
0I66	4677	0I66	MC0I66	F32
S16-HMS	462I	—	—	—
S20-HM	4623	—	—	—
S25-HM	4625	—	—	—
S25-HS	4627	—	—	—
PI6C	4705	PI653C	—	—
P20C	4717	NN20KFC	—	—
P25C	4743	P2553C	—	—

Note: OA = On Application (may be available as special collets or guide bushings)

Guide Bushings

Hardinge Model Number	Hardinge Part Number	Southwick & Meister Model Number	KEB (MasWerks) Model Number	Schaublin Model Number
CD25	465I	CD25	MCD25	—
PD4	4675	PD4	—	—
S20HGB	4657	—	—	—
SDI25R	4633	SDI25R	MDI25R	—
SNCI5	4637	SNCI5	MDI5	—
STM38	4739	STM38	MD38S	—
SW7	OA	SW7	MD7	—
T-200	4719	T-200	—	—
TD7	4679	TD7	MD7	—
TDI0	463I	TDI0	MDI0	—
TDI0TXP	OA	TDI-TXP	—	—
TD20	4635	TD20	MD20	—
TD20R	464I	TD20R	MD20R	—
TD25	4647	TD25	MD25TS	—
TD25/I67	OA	TD25/I67	—	—
TD25S	4649	TD25S (Star)	MD25	—
TD25NS	4659	TD25NS	MD25	—
TD26	4733	TD26	—	—
TD32	4653	TD32	MD32	—
TD32S	4655	TD32S	MD32S	—
TD38	OA	TD38	—	—
TSD20	4645	TSD20	MSD20	—
TSG-20R	4643	TSG-20R	MD20RTS	—
020I	4639	020I	MDO20I	—
TP20	OA	TP20	MD20	—
PI6D	4715	PI653D	—	—
P20D	474I	NN20KD	—	—
P25D	4745	P2553D	—	—



EMERGENCY COLLETS

An Emergency Collet may be used when a standard collet is not in your current inventory. It can be machined to the desired bore size and used until a hardened collet arrives.

The Extended-Nose Emergency Collet features added nose length. This feature may be necessary when doing pick-off work or to compensate for tooling interferences. The head of the collet is heat-treated to 40 Rockwell for easy machining.


Standard Emergency Collets

Style	Collet Part Number	A	B	C	D	EE	Pin Part Number
P30	4751-12-12-000000	3.700" (78)	—	—	3.346" (85)	.276" (7.0)	7723-00-00-000000 1/8" Dia. x 3/8" Long
TF15	4681-12-12-000000	2.284" (58)	—	—	2.520" (64)	.236" (5.99)	7723-00-00-000000 1/8" Dia. x 3/8" Long
TF16	4683-12-12-000000	2.284" (58)	—	—	2.520" (64)	.236" (5.99)	7723-00-00-000000 1/8" Dia. x 3/8" Long
TF20	4685-12-12-000000	2.362" (60)	—	—	2.638" (67)	.276" (7.01)	7723-00-00-000000 1/8" Dia. x 3/8" Long
TF25	4687-12-12-000000	2.638" (67)	—	—	3.032" (77)	.394" (10.00)	7723-00-00-000000 1/8" Dia. x 3/8" Long
TF30	4689-12-12-000000	2.760" (70)	—	—	3.149" (79.98)	.389" (9.88)	7723-00-00-000000 1/8" Dia. x 3/8" Long
TF34	4691-12-12-000000	2.760" (70)	—	—	3.154" (80.11)	.394" (10.00)	7723-00-00-000000 1/8" Dia. x 3/8" Long
TF37	4693-12-12-000000	3.230" (82)	—	—	3.622" (92)	.392" (9.95)	7723-00-00-000000 1/8" Dia. x 3/8" Long
S16-HMS	4695-12-12-000000	2.165" (55)	—	—	2.441" (62)	.276" (7.01)	7723-00-00-000000 1/8" Dia. x 3/8" Long
S25-HS	4697-12-12-000000	2.677" (68)	—	—	3.149" (80)	.472" (11.98)	7723-00-00-000000 1/8" Dia. x 3/8" Long
O166	4677-12-12-000000	2.325" (59)	—	—	2.559" (65)	.234" (6)	7723-00-00-000000 1/8" Dia. x 3/8" Long

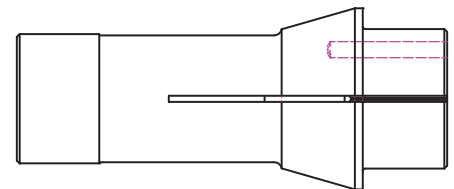

Extended-Nose Emergency Collets


Style	Collet Part Number	A	B	C	D	E	Pin Part Number
P30	4751-12-00-000000	3.700" (78)	.776" (19.7)	3.846" (97.7)	3.459" (88)	.776" (19.7)	7726-00-00-000000 1/8" Dia. x 1 1/16" Long
TF15	4681-12-00-000000	2.284" (58)	.424" (10.76)	2.708" (68.78)	2.520" (64)	.188" (4.77)	7722-00-00-000000 1/8" Dia. x 43/64" Long
TF16	4683-12-00-000000	2.284" (58)	.424" (10.76)	2.708" (68.78)	2.520" (64)	.188" (4.77)	7722-00-00-000000 1/8" Dia. x 43/64" Long
TF20	4685-12-00-000000	2.362" (60)	.464" (11.78)	2.826" (71.78)	2.638" (67)	.188" (7.31)	7724-00-00-000000 1/8" Dia. x 47/64" Long
TF25	4687-12-00-000000	2.638" (67)	.644" (16.35)	3.282" (83.36)	3.032" (77)	.250" (6.35)	7730-00-00-000000 1/8" Dia. x 57/64" Long
TF30	4689-12-00-000000	2.760" (70)	.889" (22.58)	3.649" (92.68)	3.149" (79.98)	.500" (12.70)	7726-00-00-000000 1/8" Dia. x 1 1/16" Long
TF34	4691-12-00-000000	2.760" (70)	.894" (22.70)	3.654" (92.81)	3.154" (80.11)	.500" (12.70)	7726-00-00-000000 1/8" Dia. x 1 1/16" Long
TF37	4693-12-00-000000	3.230" (82)	.892" (22.65)	4.122" (104.69)	3.622" (92)	.500" (12.70)	7726-00-00-000000 1/8" Dia. x 1 1/16" Long
S16-HMS	4695-12-00-000000	2.165" (55)	.464" (11.78)	2.629" (66.78)	2.441" (62)	.188" (4.77)	7724-00-00-000000 1/8" Dia. x 47/64" Long
S25-HS	4697-12-00-000000	2.677" (68)	.972" (24.68)	3.649" (92.68)	3.149" (80)	.500" (12.70)	7728-00-00-000000 1/8" Dia. x 1 7/16" Long
O166	4677-12-00-000000	2.325" (59)	.984" (25)	3.309" (84.05)	2.559" (65)	.750" (19.05)	7726-00-00-000000 1/8" Dia. x 1 1/4" Long

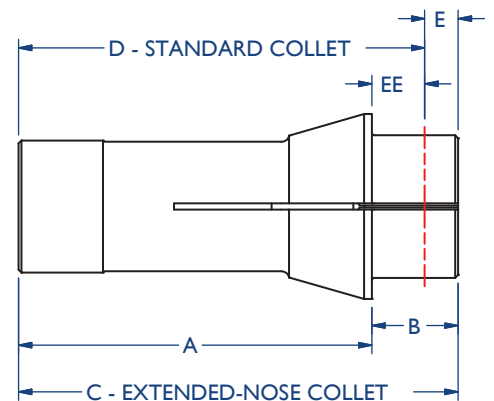

Note: Emergency Collets have a 1/16" (1.58mm) pilot hole
 Column "A" metric dimensions are rounded to nearest millimeter
 Column "B" and "C" are the exact conversion of the inch dimensions
 Millimeters in parentheses ()

TOOLHOLDER & FLOATING TAP COLLETS

Hardinge Toolholder Collets are hardened and ground to ensure maximum life during high-production machining on Swiss-type lathes. All collets are precision ground to extremely close specifications to ensure the highest concentricity possible. The collet collapsibility range is 1mm (.03937") and can be used in stationary and rotating tool holders including PCM tool holders.

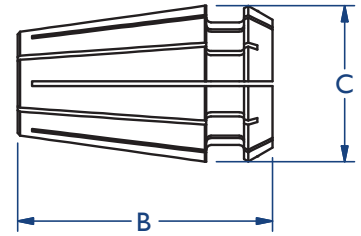

ER-Style Toolholder Collets – Inch & Metric

Description	Hardinge Part No.	Style	B Overall Length	C Outside Diameter	ID Capacity
ER-8 Collet – Metric	2093-00-17-Size	ER-8	.531" (13.50)	.334" (8.50)	1mm to 5mm by .5mm Increments
ER-11 Collet – Inch	1911-00-19-Size	ER-11	.708" (18.00)	.452" (11.50)	1/16" to 1/4" by 1/32" Increments
ER-11 Collet – Metric	1911-00-17-Size	ER-11	.708" (18.00)	.452" (11.50)	1mm to 7mm by .5mm Increments
ER-16 Collet – Inch	1913-00-19-Size	ER-16	1.083" (27.50)	.669" (16.00)	1/16" to 13/32" by 1/32" Increments
ER-16 Collet – Metric	1913-00-17-Size	ER-16	1.083" (27.50)	.669" (16.00)	1mm to 10mm by 1mm Increments
ER-20 Collet – Inch	1915-00-19-Size	ER-20	1.260" (32.00)	.827" (21.00)	1/16" to 1/2" by 1/32" Increments
ER-20 Collet – Metric	1915-00-17-Size	ER-20	1.260" (32.00)	.827" (21.00)	1mm to 13mm by 1mm Increments
ER-25 Collet – Inch	2095-00-19-Size	ER-25	1.338" (34.00)	.984" (25.00)	1/16" to 5/8" by 1/32" Increments
ER-25 Collet – Metric	2095-00-17-Size	ER-25	1.338" (34.00)	.984" (25.00)	2mm to 16mm by 1mm Increments
ER-32 Collet – Inch	1917-00-19-Size	ER-32	1.575" (40.00)	1.260" (32.00)	3/32" to 1" by 1/32" Increments
ER-32 Collet – Metric	1917-00-17-Size	ER-32	1.575" (40.00)	1.260" (32.00)	3mm to 20mm by 1mm Increments

ERQC Quick-Change Floating Solid Tap Collets

Quick-Change Tap Collets can be used in any standard ER/DR/ESX style collet holder. Taps can be quickly changed without removing the collet, while maintaining gauge lengths from one tap to the next. The collet has a ball bearing tension compensating float and a solid square drive that eliminates tap slippage.



Description	Hardinge Part No.	Style	Shank & ID	Tap Capacity
ERQC-16 Quick-Change Tap Collet	2143-00-18-Size	ERQC-16	.141", .168" and .194"	#0 to 6, #8 and #10
ERQC-20 Quick-Change Tap Collet	2145-00-18-Size	ERQC-20	.141", .168", .194", .220" and .255"	#0 to 6, #8, #10, #12, and 1/4"
ERQC-25 Quick-Change Tap Collet	2147-00-18-Size	ERQC-25	.141", .168", .194", .220", .255", .318", .381", .323" and .367"	#0 to #6, #8, #10, #12, 1/4", 5/16", 3/8", 7/16" and 1/2"
ERQC-32 Quick-Change Tap Collet	2149-00-18-Size	ERQC-32	.141", .168", .194", .220", .255", .318", .381", .323", .367" and .429"	#0 to #6, #8, #10, #12, 1/4", 5/16", 3/8", 7/16", 1/2" and 9/16"

– Millimeters in parentheses ()


ANSI Standard Tap and Collet/Shank Sizes

TAP Inch	#0 to #6	#8	#10	#12	1/4"	5/16"	7/16"	1/2"	3/8"	9/16"	1/8" NPT	5/8"
TAP mm	1 to 3.5	4 mm	5mm	—	6mm	8mm	—	12mm	10mm	14mm	—	16mm
SHANK	.141"	.168"	.194"	.220"	.255"	.318"	.323"	.367"	.381"	.429"	.437"	.480"

FMB BAR LOADER COLLET

Style-D

Hardinge Bar Loader Collets are engineered for wear resistance, thus requiring fewer collet replacements. D-style collets are supplied with a cross hole for pin mounting and are available in fractional and decimal sizes.

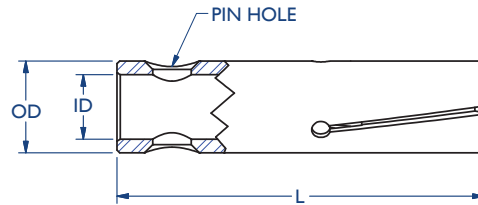


* Models 4801, 4805 and 4809 have an internal thread with no pin holes.

Machine Builders' Model No.	Hardinge Part No.	OD		ID		L Length		Collet Range		Increment	
5D	4801*	.196"	(5.00)	M4 x .7 THD		1.102"	(28.00)	$\frac{1}{16}"$ to $\frac{7}{64}"$	.050" to .118"	$\frac{1}{32}"$	.001"
7D	4805*	.275"	(7.00)	M5 x .8 THD		1.102"	(28.00)	$\frac{1}{16}"$ to $\frac{3}{16}"$	.050" to .197"	$\frac{1}{32}"$	.001"
10D	4809*	.393"	(10.00)	.275"	(7.00)	1.574"	(40.00)	$\frac{1}{16}"$ to $\frac{5}{16}"$	.050" to .315"	$\frac{1}{32}"$	.001"
12D	4813	.472"	(12.00)	.314"	(8.00)	1.574"	(40.00)	$\frac{1}{16}"$ to $\frac{25}{64}"$	.050" to .394"	$\frac{1}{32}"$	.001"
15D	4819	.590"	(15.00)	.433"	(11.00)	1.574"	(40.00)	$\frac{1}{16}"$ to $\frac{1}{2}"$	.050" to .512"	$\frac{1}{16}"$	.001"
18D/15	4823	.708"	(18.00)	.433"	(11.00)	1.574"	(40.00)	$\frac{13}{64}"$ to $\frac{5}{8}"$	.200" to .630"	$\frac{1}{16}"$	.001"
18D/NS	4825	.708"	(18.00)	.433"	(11.00)	2.559"	(65.00)	$\frac{13}{64}"$ to $\frac{5}{8}"$	.200" to .630"	$\frac{1}{16}"$	.001"
18D	4827	.708"	(18.00)	.551"	(14.00)	2.559"	(65.00)	$\frac{3}{32}"$ to $\frac{5}{8}"$	.093" to .630"	$\frac{1}{16}"$	.001"
20D	4815	.787"	(20.00)	.551"	(14.00)	2.559"	(65.00)	$\frac{7}{64}"$ to $\frac{11}{16}"$	.100" to .709"	$\frac{1}{16}"$	.001"
22D/20	4835	.866"	(22.00)	.551"	(14.00)	2.559"	(65.00)	$\frac{13}{64}"$ to $\frac{25}{32}"$	.200" to .787"	$\frac{1}{16}"$	.001"
25D	4837	.984"	(25.00)	.787"	(20.00)	2.559"	(65.00)	$\frac{13}{64}"$ to $\frac{29}{32}"$	.200" to .906"	$\frac{1}{16}"$	.001"
28D	4841	1.102"	(28.00)	.787"	(20.00)	2.559"	(65.00)	$\frac{1}{2}"$ to $1\frac{1}{64}"$.500" to 1.024"		$\frac{1}{16}"$	.001"

Note: Order hole capacity is equal to actual size with a -.004" range and has no over-range capacity. Therefore, the order hole size cannot be smaller than the bar stock.

Style-DL

DL-style Collets all have 20mm rear bore for mounting and are secured with two set screws. This common mounting feature allows interchanging the collets between different units. Available in fractional and decimal sizes.

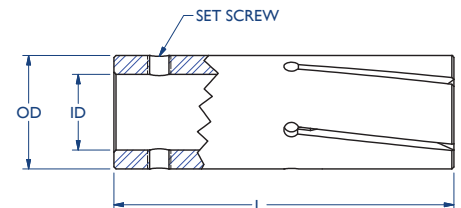


Machine Builders' Model No.	Hardinge Part No.	OD		ID		L Length		Collet Range		Increment		Set Screw (mm)
25DL	4847	.984"	(25.00)	.787"	(20.00)	3.543"	(90.00)	$\frac{13}{64}"$ to $\frac{55}{64}"$	.194" to .866"	$\frac{1}{16}"$	.001"	M6 x 1 x 6
30DL	4849	1.181"	(30.00)	.787"	(20.00)	3.543"	(90.00)	$\frac{1}{2}"$ to $1\frac{1}{16}"$	.500" to 1.063"	$\frac{1}{16}"$	.001"	M6 x 1 x 6
32DL	4851	1.259"	(32.00)	.787"	(20.00)	3.543"	(90.00)	$\frac{5}{8}"$ to $1\frac{9}{64}"$	.625" to 1.140"	$\frac{1}{16}"$	.001"	M6 x 1 x 6
34DL	4853	1.338"	(34.00)	.787"	(20.00)	3.543"	(90.00)	$\frac{3}{4}"$ to $1\frac{7}{32}"$	.750" to 1.218"	$\frac{1}{16}"$	.001"	M6 x 1 x 6
36DL	4855	1.417"	(36.00)	.787"	(20.00)	3.543"	(90.00)	$\frac{7}{8}"$ to $1\frac{19}{64}"$	.875" to 1.297"	$\frac{1}{16}"$	.001"	M8 x 1.25 x 8
38DL	4857	1.496"	(38.00)	.787"	(20.00)	3.543"	(90.00)	1" to $1\frac{3}{8}"$	1.000" to 1.378"	$\frac{1}{16}"$	.001"	M8 x 1.25 x 8
42DL	4863	1.653"	(42.00)	.787"	(20.00)	3.543"	(90.00)	$1\frac{1}{4}"$ to $1\frac{17}{32}"$	1.250" to 1.531"	$\frac{1}{16}"$	.001"	M8 x 1.25 x 10
45DL	4865	1.771"	(45.00)	.787"	(20.00)	3.543"	(90.00)	$1\frac{3}{8}"$ to $1\frac{41}{64}"$	1.375" to 1.653"	$\frac{1}{16}"$	.001"	M8 x 1.25 x 10
50DL	4867	1.968"	(50.00)	.787"	(20.00)	3.543"	(90.00)	$1\frac{1}{2}"$ to $1\frac{27}{32}"$	1.500" to 1.843"	$\frac{1}{16}"$	.001"	M8 x 1.25 x 16
60DL	4869	2.362"	(60.00)	.787"	(20.00)	3.543"	(90.00)	$1\frac{3}{4}"$ to $2\frac{15}{64}"$	1.750" to 2.244"	$\frac{1}{16}"$	.001"	M8 x 1.25 x 20
65DL	4871	2.559"	(65.00)	.787"	(20.00)	3.543"	(90.00)	2" to $2\frac{7}{16}"$	2.000" to 2.440"	$\frac{1}{16}"$	.001"	M8 x 1.25 x 20
70DL	4873	2.756"	(70.00)	.787"	(20.00)	3.543"	(90.00)	$2\frac{3}{16}"$ to $2\frac{5}{8}"$	2.187" to 2.638"	$\frac{1}{16}"$	.001"	M8 x 1.25 x 20

Millimeters in parentheses () Bar loader collets are set to normal tension unless otherwise specified. If an application requires a lighter or heavier tension, please specify when ordering.

LNS BAR LOADER COLLET

Style-D

Hardinge Bar Loader Collets are engineered for wear resistance, thus requiring fewer collet replacements. D-style collets are supplied with a cross hole for pin mounting and are available in fractional and decimal sizes.

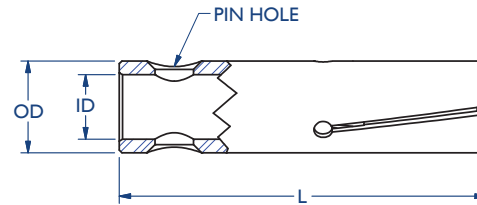


* Models 4803, 4807 and 4811 have an internal thread with no pin holes.

Machine Builders' Model No.	Hardinge Part No.	OD		ID		L Length		Collet Range		Increment		Cross Drill	
LN6D	4803*	.236"	(6.00)	M4 x .7mm THD		1.181"	(30.00)	5/64" to 5/32"	.078" to .157"	1/32"	.001"	---	
LN7D	4807*	.275"	(7.00)	M5 x .8mm THD		1.456"	(37.00)	1/8" to 3/16"	.118" to .197"	1/32"	.001"	---	
LN10D	4811*	.393"	(10.00)	M5 x .8mm THD		1.456"	(37.00)	5/64" to 5/16"	.078" to .315"	1/32"	.001"	---	
I0D	4809	.393"	(10.00)	.275"	(7.00)	1.574"	(40.00)	1/16" to 5/16"	.050" to .315"	1/32"	.001"	.165"	(4.20)
I2D	4813	.472"	(12.00)	.314"	(8.00)	1.574"	(40.00)	1/16" to 25/64"	.050" to .394"	1/32"	.001"	.165"	(4.20)
I3D	4831	.512"	(13.00)	.314"	(8.00)	1.574"	(40.00)	7/64" to 27/64"	.100" to .433"	1/32"	.001"	.165"	(4.20)
I4D	4817	.551"	(14.00)	.314"	(8.00)	1.574"	(40.00)	5/16" to 15/32"	.315" to .472"	1/32"	.001"	.165"	(4.20)
I5D	4819	.590"	(15.00)	.433"	(11.00)	1.574"	(40.00)	1/16" to 1/2"	.050" to .512"	1/16"	.001"	.244"	(6.20)
I6D	4821	.630"	(16.00)	.433"	(11.00)	1.574"	(40.00)	7/64" to 36/64"	.100" to .551"	1/16"	.001"	.244"	(6.20)
I8D/I5	4823	.708"	(18.00)	.433"	(11.00)	1.574"	(40.00)	13/64" to 5/8"	.200" to .630"	1/16"	.001"	.244"	(6.20)
I9D	4829	.748"	(19.00)	.433"	(11.00)	1.574"	(40.00)	33/64" to 21/32"	.511" to .669"	1/16"	.001"	.322"	(6.20)
20D	4815	.787"	(20.00)	.551"	(14.00)	2.559"	(65.00)	7/64" to 11/16"	.100" to .709"	1/16"	.001"	.322"	(8.20)
21D	4833	.826"	(21.00)	.551"	(14.00)	2.559"	(65.00)	9/16" to 3/4"	.551" to .748"	1/16"	.001"	.322"	(8.20)
22D/20	4835	.866"	(22.00)	.551"	(14.00)	2.559"	(65.00)	13/64" to 25/32"	.200" to .787"	1/16"	.001"	.322"	(8.20)
25D	4837	.984"	(25.00)	.787"	(20.00)	2.559"	(65.00)	13/64" to 29/32"	.200" to .906"	1/16"	.001"	.322"	(8.20)
27D	4839	1.062"	(27.00)	.787"	(20.00)	2.559"	(65.00)	53/64" to 63/64"	.827" to .984"	1/16"	.001"	.322"	(8.20)
28D	4841	1.102"	(28.00)	.787"	(20.00)	2.559"	(65.00)	1/2" to 11/16"	.500" to 1.024"	1/16"	.001"	.322"	(8.20)
30D	4843	1.181"	(30.00)	.787"	(20.00)	2.559"	(65.00)	63/64" to 13/32"	.984" to 1.102"	1/16"	.001"	.322"	(8.20)
32D	4845	1.259"	(32.00)	.787"	(20.00)	2.559"	(65.00)	63/64" to 11/16"	.984" to 1.181"	1/16"	.001"	.322"	(8.20)

Note: Order hole capacity is equal to actual size with a -.004" range and has no over-range capacity. Therefore, the order hole size cannot be smaller than the bar stock.

Style-DL

DL-style Collets all have 20mm rear bore for mounting and are secured with two set screws. This common mounting feature allows interchanging the collets between different units. Available in fractional and decimal sizes.

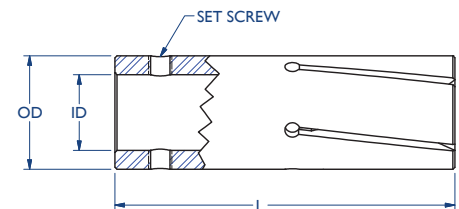


Machine Builders' Model No.	Hardinge Part No.	OD		ID		L Length		Collet Range		Increment		Set Screw (mm)
34DL	4853	1.338"	(34.00)	.787"	(20.00)	3.543"	(90.00)	11/8" to 11/4"	1.102" to 1.220"	1/16"	.001"	M6 x 1.00mm
36DL	4855	1.417"	(36.00)	.787"	(20.00)	3.543"	(90.00)	13/16" to 15/16"	1.181" to 1.299"	1/16"	.001"	M8 x 1.25mm
38DL	4857	1.496"	(38.00)	.787"	(20.00)	3.543"	(90.00)	15/16" to 13/8"	1.260" to 1.378"	1/16"	.001"	M8 x 1.25mm
40DL	4859	1.574"	(40.00)	.787"	(20.00)	3.543"	(90.00)	111/32" to 17/16"	1.339" to 1.457"	1/16"	.001"	M8 x 1.25mm
42DL	4863	1.653"	(42.00)	.787"	(20.00)	3.543"	(90.00)	17/16" to 19/16"	1.417" to 1.535"	1/16"	.001"	M8 x 1.25mm

Note: Millimeters in parentheses (). Bar loader collets are set to normal tension unless otherwise specified. If an application requires a lighter or heavier tension, please specify when ordering. The bore range listed is recommended by LNS as the most desirable to use. Bores below listed minimum are available in fractional or decimal sizes.

BAR LOADER COLLETS

Hardinge Bar Loader Collets are engineered for wear resistance, thus requiring fewer collet replacements. D-style collets are supplied with a cross hole for pin mounting and are available in fractional and decimal sizes.

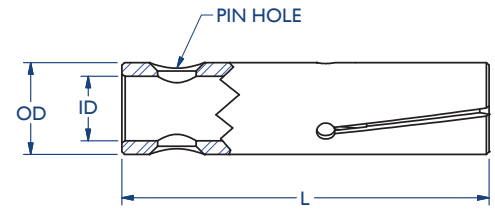


* Models 4801 and 4805 have an internal thread with no pin holes.

Robobar

Machine Builders' Model No.	Hardinge Part No.	OD	ID	Length	Collet Range		Increment	Tomos Catalog No.
5D	4801*	.196" (5.00)	M4 x .7mm THD	1.102" (28.00)	1/16" to 7/64"	.050" to .118"	1/32" .001"	26/5.5
7D	4805*	.275" (7.00)	M5 x .8mm THD	1.102" (28.00)	1/16" to 3/16"	.050" to .197"	1/32" .001"	26/7.5
10D	4809	.393" (10.00)	.275" (7.00)	1.574" (40.00)	1/16" to 5/16"	.050" to .315"	1/32" .001"	26/10.5
12D	4813	.472" (12.00)	.314" (8.00)	1.574" (40.00)	1/16" to 25/64"	.050" to .394"	1/32" .001"	26/12.5
15D	4819	.590" (15.00)	.433" (11.00)	1.574" (40.00)	1/16" to 1/2"	.050" to .512"	1/16" .001"	26/16
18D	4827	.708" (18.00)	.551" (14.00)	2.559" (65.00)	1/8" to 5/8"	.093" to .630"	1/16" .001"	—
20D	4815	.787" (20.00)	.551" (14.00)	2.559" (65.00)	7/64" to 11/16"	.100" to .709"	1/16" .001"	26/21
25D	4837	.984" (25.00)	.787" (20.00)	2.559" (65.00)	13/64" to 29/32"	.200" to .906"	1/16" .001"	26/26
28D	4841	1.102" (28.00)	.787" (20.00)	2.559" (65.00)	1/2" to 1 1/64"	.500" to 1.024"	1/16" .001"	—

Other Bar Loader Collets available on request.

Note: Millimeters in parentheses () All "D" style collets have a pin hole for mounting. The bar loader collet mounting stud on the 25D collet must be altered when using 1/2" diameter stock and smaller.

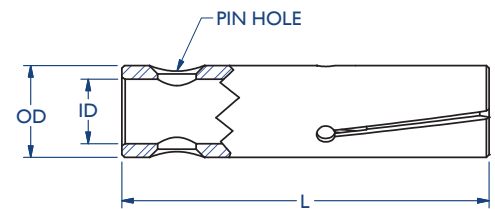

* Models 4889 and 4891 have an internal thread with no pin holes.

Citizen

Machine Builders' Model No.	Hardinge Part No.	OD	ID	Length	Collet Range	Cross Hole
4.5L	4889-	.177" (4.5)	M3 X .5 LH	1.063" (27)	.030" - .137"	
5.5L	4891-	.216" (5.5)	M3 X .5 LH	1.063" (27)	.030" - .175"	
FC7DL	4909-	.276" (7)	M6 X 1 LH EXT	1.575" (40)	.061" - .231"	
FC10DL	4911-	.393" (10)	M6 X 1 LH EXT	1.575" (40)	.078" - .334"	
FC12DL	4913-	.472" (12)	M6 X 1 LH EXT	1.575" (40)	.334" - .413"	
FC25NF	4901-	.986" (25)	.635" (16.1)	2.992" (76)	.200" - .875"	.317" (8)
FC32NF	4905-	1.260" (32)	.635" (16.1)	2.992" (76)	.625" - 1.140"	.317" (8)
FC34NF	4907-	1.339" (34)	.635" (16.1)	2.992" (76)	.750" - 1.215"	.317" (8)
CIT15NF	4893-	.591" (15)	.396" (10)	2.165" (55)	.078" - .546"	.238" (6)
CIT17NF	4895-	.669" (17)	.396" (10)	2.165" (55)	.546" - .629"	.238" (6)
CIT19NF	4897-	.748" (19)	.396" (10)	2.224" (56.5)	.629" - .669"	.238" (6)
CIT21NF	4899-	.790" (20)	.396" (10)	2.224" (56.5)	.669" - .748"	.238" (6)

TOOL HOLDERS, COLLETS & BUSHINGS

Hardinge offers a complete line of tool holders, tap holders, toolholder collets, tap collets and bushings that can be used on your Swiss-type lathe. We offer reliable and economical solutions for back-end, sub-spindle and end-working slides. For more information request brochure 2351.



ERTCSP Tap Collets

are designed for use in a floating tap holder. They are multi-split with more shank bearing surface than ER/DR collets. The bore is the exact size of the shank with a square broached hole to eliminate tap slippage.



ERTC Floating Tap Collets

are designed for a specific tap shank size to be used in combination with tool/tap holders. These collets are not used in floating tap holders.



Floating Tap Holders

for standard ER (split) collets.



Rigid Tap Holders

for floating tap collets.



Standard Round Shank ER Collet Holders



HDB Hardened & Ground Split Bushings

help to eliminate interference common to ER tool holders. Knurled shoulder for easy installation and removal.

CUSTOM APPLICATION MFG.



Hardinge will custom manufacture Swiss-style collets and guide bushings, as well as draw collets and step chucks. Special-accuracy collets and step chucks (typically one-half of our standard accuracy), extremely deep and/or large diameter step chucks and closers are some of the frequently made items in our special collet department. If you have a special workholding application, Hardinge can manufacture a workholding device to grip it accurately.


Specials are manufactured to rigid specifications, including material, time-proven heat treatment and machined accuracy. Hardinge's engineering department provides technical assistance in designing your collet, step chuck or related workholding device for your special machining needs.

When sample parts are being sent to us, please call for an RMA (Return Material Authorization) number to help speed up the quote process.

For generations, Hardinge "Specials" have been the choice of experienced machinists, manufacturing engineers and forward-thinking manufacturers around the world:

RECTANGULAR
SERRATED HEX OR SQUARE
EXTRUDED SHAPES
ZIG-ZAG SLOTTED
ANGULAR SLOTTED
NON-ROUND
STEPPED
OFF-CENTER
EXPANDING
LONG BEARING
LONG BEARING CARBIDE
MEEHANITE-LINED
SPECIAL SHAPE
SPECIAL ACCURACY
EXTENDED NOSE
EXPANDING
OFF-CENTER
STEPPED
NON-ROUND
ANGULAR SLOTTED
ZIG-ZAG SLOTTED

CUSTOM SOLUTIONS FOR CITIZEN LATHES

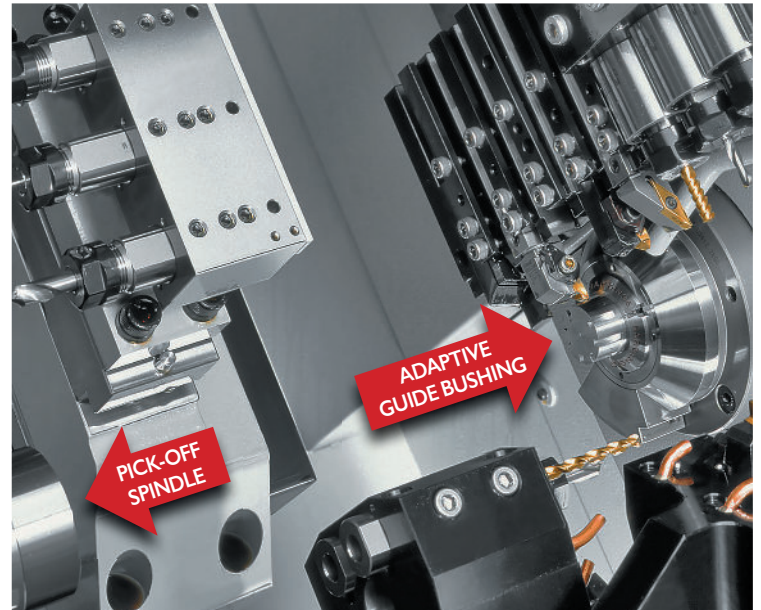

Adaptive Guide Bushing Collets

The high cost of ground stock leads some shops to turn to a newer type of guide bushing, the adaptive guide bushing, which permits the use of less costly non-ground stock.

The Citizen adaptive guide bushing system uses air pressure to open and close the guide bushing collet as the size of material being machined changes. Hardinge manufactures double-angle adaptive guide bushing collets in cooperation with Citizen Machinery America for use in Citizen machines that have the adaptive guide bushing kit installed.

- Premium material and heat treat process
- Superior surface finish
- Accuracy to 0.0005" (.0127mm) TIR
- Variation of $\pm .003$ " (.08mm) to accommodate non-ground stock

The following information is required to place your order:

Bar Size _____ Bar Tolerance _____ ($\pm .003$ max)


Bar Material _____ Machine Model _____

** A Citizen Adaptive Guide Bushing Kit must be installed in your machine to permit use of the adaptive guide bushing collet. Kits are available for new machine orders and can also be retrofitted to some existing machines. For more information call Citizen at 201-818-0100. Part numbers are included below.

CITIZEN MACHINERY AMERICA INC
in partnership with Hardinge Inc.

Overgrip Collets

Overgrip collets, also referred to as over-the-shoulder collets, are used on a pick-off spindle when it is required to clear a shoulder and grip on a smaller diameter beyond. A good example of this type of part would be a screw. Hardinge manufactures TF-25 OG overgrip collets for Citizen M20 and L720 lathes. The following information is required to place your order:

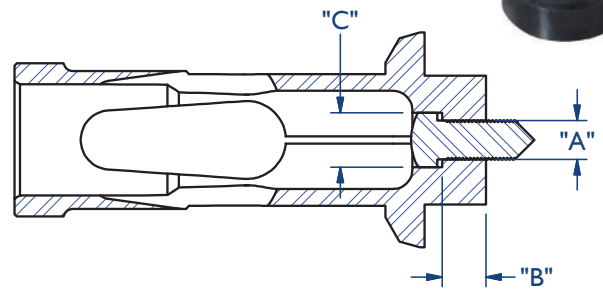


Grip Diameter "A" (max .505"/12.8mm) _____
Grip Length "B" (max .470"/11.9mm) _____
Part Diameter "C" (max .630"/16.0mm) _____ *

* If the "C" dimension is greater than .086"/2.2mm, but less than .118"/3.0mm maximum overgrip, you must purchase an Overgrip Collet Kit from Citizen Machinery America Inc. (201-818-0100). Part numbers are included below.

Adaptive Guide Bushing Hardinge Part No.	Size	Capacity	Adaptive Guide Bushing Kit ** Citizen Part No.
97Z-1102	20mm	.157-.787" (4-20mm)	GB-A220-0000
97Z-1653	32mm	.236-1.259" (6-32mm)	GB-A332-0000
97Z-1102	20mm	.157-.787" (4-20mm)	GB-L720-0000
97Z-1102	20mm	.157-.787" (4-20mm)	GB-M220-0000
97Z-1653	32mm	.236-1.259" (6-32mm)	GB-M332-0000

Citizen Machine	Overgrip Collet Hardinge Part No.	Overgrip Collet Kit * Citizen Part No.
A20 (type 7)	—	—
A32	—	—
L720	4613-75-00000003	BD-6015
M20	4613-75-00000003	BD-6015
M32	—	—

HARDINGE WORLDWIDE

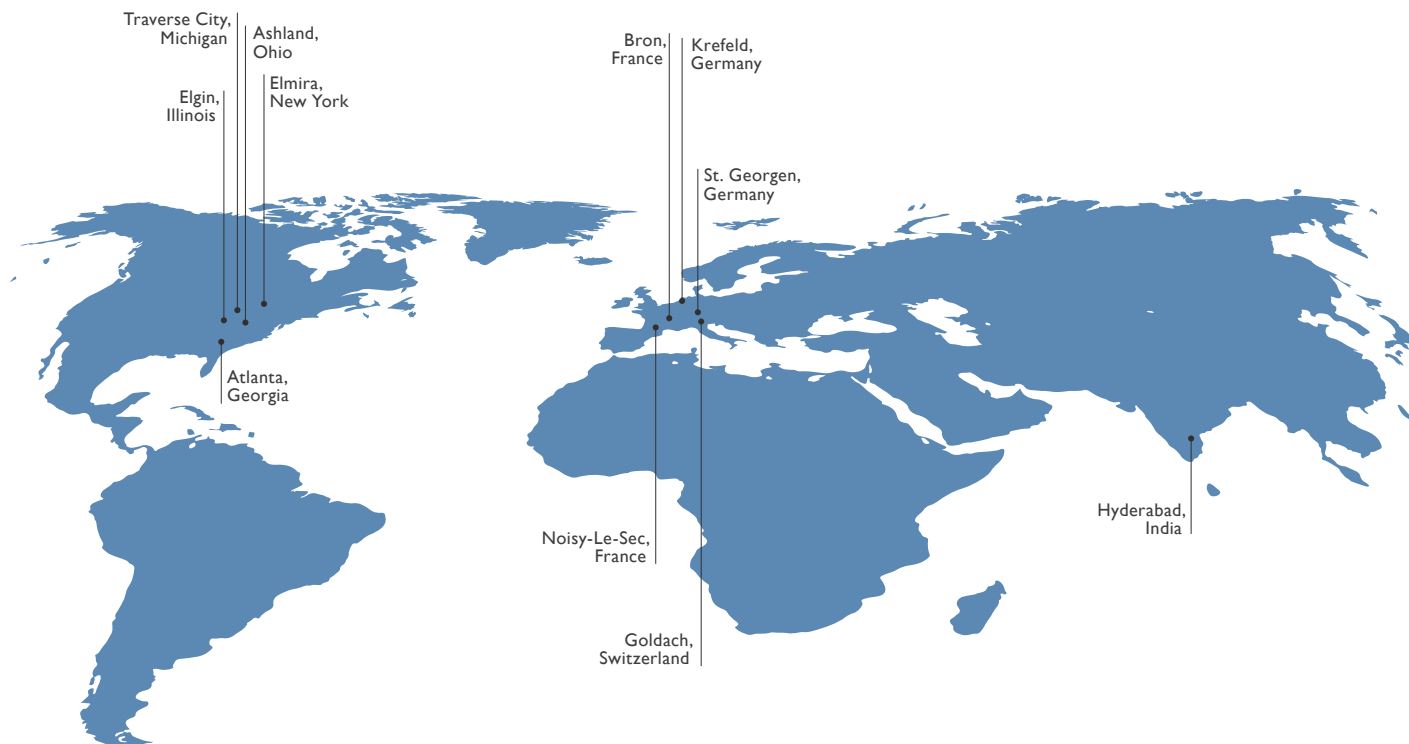

Hardinge is a leading international provider of advanced metal-cutting solutions. We provide a full spectrum of highly reliable CNC turning, grinding, and honing machines as well as technologically advanced workholding accessories.

The diverse products we offer enable us to support a variety of market applications in industries including aerospace, agricultural, automotive, construction, consumer products, defense, energy, medical, technology, transportation and more.

We've developed a strong global presence with manufacturing operations in North America and Europe. Hardinge applies its engineering and applications expertise to provide your company with the right machine tool solution and support every time.

AMERICAS

GEORGIA
Hardinge Corporate
79 W Paces Ferry Rd, 2F
Atlanta, GA 30305
P. 800.843.8801

ILLINOIS
USACH
1755 Britannia Dr
Unit A
Elgin, IL 60124

MICHIGAN
Forkardt Hardinge
2155 Traversefield Dr
Traverse City, MI 49686
P. 800.544.3823
E. tcsales@forkardt.com

NEW YORK
Hardinge
1 Hardinge Drive
Elmira, NY 14903
P. 800.843.8801
E. info@hardinge.com

OHIO
Ohio Tool Works
1374 Enterprise Parkway (TR 743)
Ashland, OH 44805
P. 419.281.3700
E. sales@ohiotoolworks.com

EUROPE

SWITZERLAND
Hardinge Kellenberger AG
Thannackerstrasse 22
CH-9403 Goldach
P. +41 71 2429111
E. info@kellenberger.net

GERMANY
Hardinge GmbH
Fichtenhain A 13c
47807 Krefeld
P. 49 2151 49649 10
E. info@hardinge-gmbh.de

J.G. Weisser Söhne GmbH
Johann-Georg-Weisser-Straße 1
78112 St. Georgen
P. +49 7724 881-0
E. info@weisser-web.com

FRANCE
Jones & Shipman SARL
8 Allee des Ginkgos
BP 112-69672
Bron Cedex, France

HARDINGE.COM | SHOP.HARDINGE.COM

800-843-8801 • info@hardinge.com • parts@hardinge.com • service@hardinge.com

All prices and specifications are subject to change without notice.
All marks indicated by ® and ™ are trademarks of their respective owners.
#2230SwissTypeCollets © Hardinge Inc. 2023 • 09/2023